

Pallet fork

Forklift frame for excavators




engcon's pallet forks/forklift frames – A robust and cleverly engineered design for best visibility. Tempered forks assure long service life.

NOTE! Always check which safety instructions apply for use of a pallet fork on the type of machine being used. A check valve must be fitted to the tiltrotator if it is to be used with a pallet fork.

engcon and EC233 tiltrotators are fitted with load-holding valves in the tilt cylinders as standard equipment.

- » The EC-Oil automatic Quick Coupler system connects the hydraulics without the operator needing to leave the cab
- » Operation of hydraulic pallet forks is done from within the cab
- » Mechanical hydraulic pallet forks are held in the correct position with a robust latch and the position is adjusted manually
- » Forged forks for maximum durability and service life

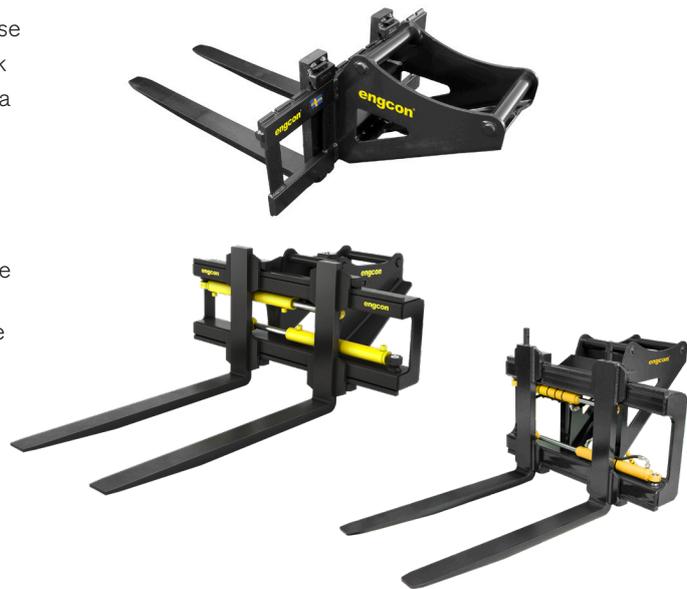

GH = mechanical fork widening,
GHH = hydraulic fork widening
GHH1200L = Hydraulic fork widening,
 Light version for lighter machines.

NEWS! The EC-Oil automatic Quick Coupler system is a free standard on all engcon's hydraulic tools with S45-S80 attachment points.

Specifications

Model	GH1000	GH1200	GHH1200	GHH1200L	GHH1200L
Width: (inch)	39.4	47.2	47.2	47.2	47.2
Blade: (inch)	3.9x1.6x47.2	4.9x1.8x47.2	4.9x1.8x47.2	3.9x1.6x47.2	4.9x1.8x47.2
Weight: (lbs)*	396	770	880	572	689
TP500 (lbs)	6.393	10.361	10.361	6.393	10.361

* Depending on bracket

CHANGE THE WORLD OF DIGGING